



FOR MODEL SERIES: Bath Bar

READ & SAVE THESE INSTRUCTIONS

INSTALLATION & OPERATION INSTRUCTIONS

TOOLS & MATERIALS REQUIRED

- Blade screw driver
- Adjustable wrench
- Step Ladder
- Wire cutters
- wiring supplies as required by electrical code

CAUTION: Before assembling your Lighting fixture, refer to the section titled **ELECTRICAL CONNECTIONS**. If you feel you do not have electrical wiring experience, refer to a do-it-yourself wiring handbook or have your fixture installed by a qualified licensed electrician.

GENERAL

1. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.
2. All electrical connections must be in accordance with local codes, ordinances, or the National Electrical Code. If you are unfamiliar with methods of installing electrical wiring, secure the services of a qualified licensed electrician.
3. These fixtures are intended to be mounted to a 4" x 2 1/8" deep metal octagon outlet box. The box must be directly supported by the building structure.
4. Before starting the installation, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.

NOTE: The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution, and care are factors which cannot be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture.

UNPACK THE FIXTURE

Check the contents of the box. You should receive:

- Mounting hardware package
- Mounting Bracket or mounting plate
- Bathbar
- Swizzles and lucite sides (not supplied with all models)



PREPARE THE FIXTURE

NOTE: FIRST TURN OFF ELECTRICITY

1. If you are replacing an existing fixture, disconnect and remove the old fixture. Expose the supply wiring from the outlet box.
2. Refer to the illustration and follow the instruction for the applicable mounting style.



STYLE 1:

1. If your fixture is supplied with a threaded stem, decorative cap nut and mounting bracket, screw the threaded stem (3 complete turns) into the mounting bracket and lock into place with the locknut provided.
2. Fasten the mounting bracket to the outlet box using the 2 screws provided with the outlet box.
3. Make electrical connections-SEE BELOW.
4. Place the bath bar against the mounting surface allowing the threaded stem to pass through the frontplate. Secure with decorative nut provided.

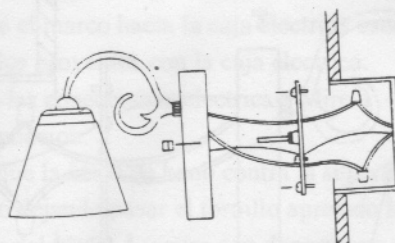

STYLE 2:

1. Separate and remove the backplate from the plate of the bath bar.
2. Mount the backplate to the outlet box using the 2 screws provided with the outlet box.
3. Make Electrical Connections-SEE BELOW.
4. Place front of the bath bar on backplate and secure with the four (4) screws provided.

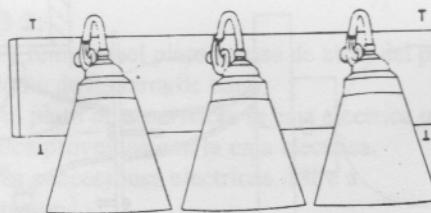



ELECTRICAL CONNECTIONS

To make electrical connections:

Connect the white wire(s) from the fixture to the white wire of the supply circuit. Connect the black wire(s) from the fixture to the black wire of the supply circuit. Connect the green (or bare copper) colored wire to the grounding conductor of the supply circuit. If your fixture is supplied with an SPT Cord, connect the half of the SPT Cord that is ribbed surface to the white wire of the supply circuit. Connect the smooth half of the wire (the half with markings) to the black wire of the supply circuit. Use U.L. Listed wire connectors suitable for the size, type and number of conductors. No loose strands or loose wires should be present. Secure wire connectors with U.L. listed electrical tape.

STYLE 3:

1. Separate and remove the backplate from the front plate of the bath bar.
2. Thread the machine screws into the opposite side of the backplate so the screws face the outward direction. Mount the backplate to the outlet box using the 2 screws provided.
3. Make electrical connections-SEE BELOW.
4. Place the front of the bathbar on backplate allowing the screws to pass through. Secure with the decorative nuts provided.

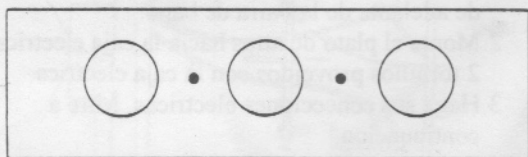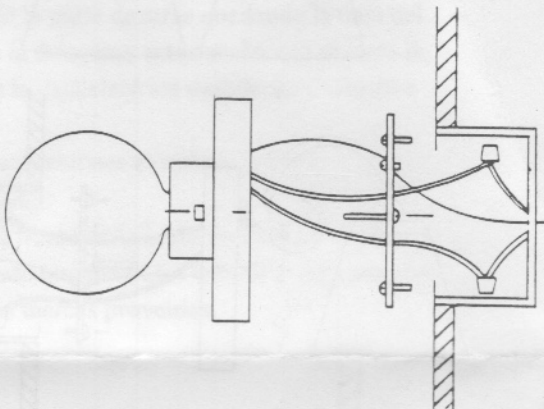

FINAL ASSEMBLY

1. Spread the electrical splices so that the black wires are on one side of the outlet box and the white wires are on the other side.
2. If applicable, place candle cover(s) over lampholder(s) before installing bulb(s). Install the lightbulb(s) (not provided).

CAUTION: Refer to the relamping label located near the lampholder for recommended maximum wattage-do not exceed recommended wattage.

3. If applicable, attach shades to fixture. Some shades require the use of shade attachment screws. Do not overtighten these screws-too much pressure could cause glass breakage.
4. Restore electricity and check the operation your new lighting fixture.